

Switchback Sensor Setting

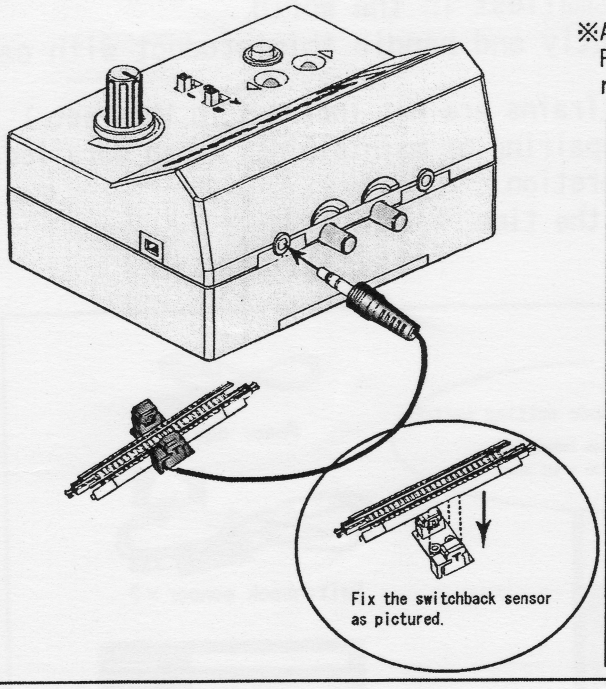


Fix the switchback sensor as pictured.

※Attention for usage
Please adjust the speed of the train if it doesn't run by lack of power supply.

Example

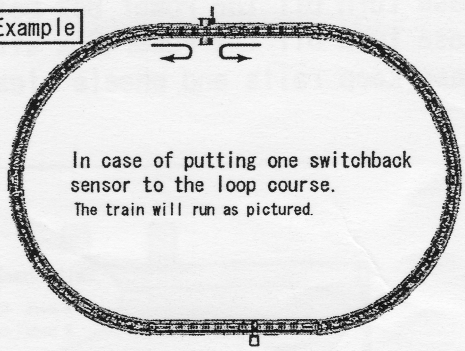



In case of putting one switchback sensor to the loop course.
The train will run as pictured.



In case of putting two sensors at the both ends of the track.
The train will run automatically between the sensors as pictured.

■How to use the Wheel cleaner

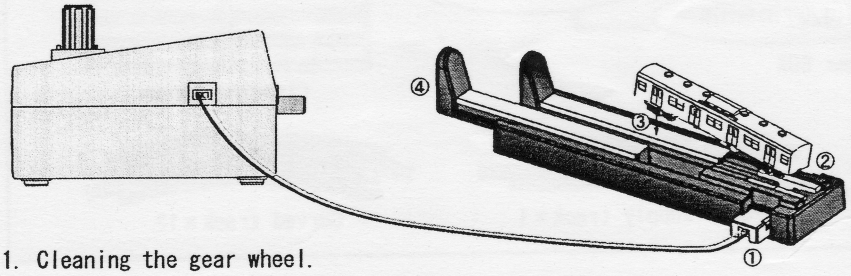

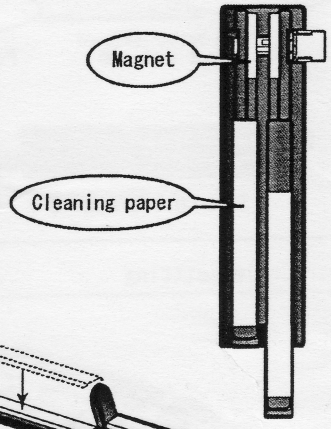

1. Cleaning the gear wheel.

①Insert the connecter of Power cable to the wheel cleaner.

② Set the wheels without power transmission to the magnet.


③ Put the power transmission wheels to the cleaning paper, and turn on the Power Box to rotate the wheel.

2. Cleaning the other wheels.

④ Set a train on the cleaner lightly and move both slide knobs alternately.

*Both slide knobs are the same, so exchange right and left when they're dirty.

*Apply the cleaning paper as pictured for replacement.

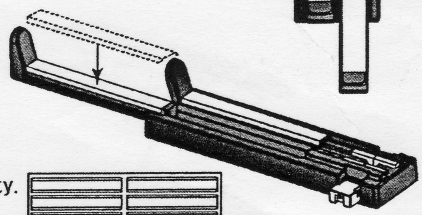

Cleaning paper