
Attention

The train will derail if there is a difference in level of the rail.

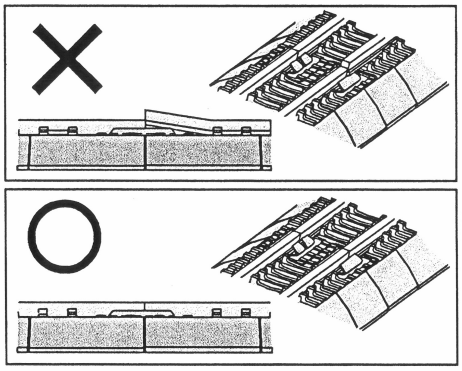


Since the switchback sensor uses infrared rays, please do not use it under the direct rays of the sun.

The wheel cleaner has strong magnets, so please keep it away from PC, artificial pacemaker, etc.


About the usage of switchback sensors. In case of using two switchback sensors at the same time, please use new batteries or AC adapter (option).

How to use the rerailer.


First, place the rerailer on the rail shown as picture No. 1. Then, slide a train onto the rail. (picture No. 2)




picture No. 1

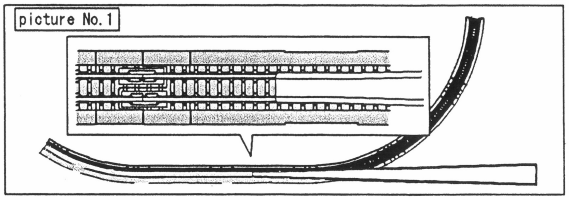

picture No. 2

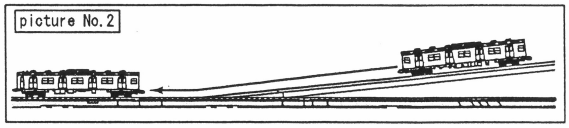

If the train tends to decouple while operation, please exchange the coupler to an accessory part as pictured.

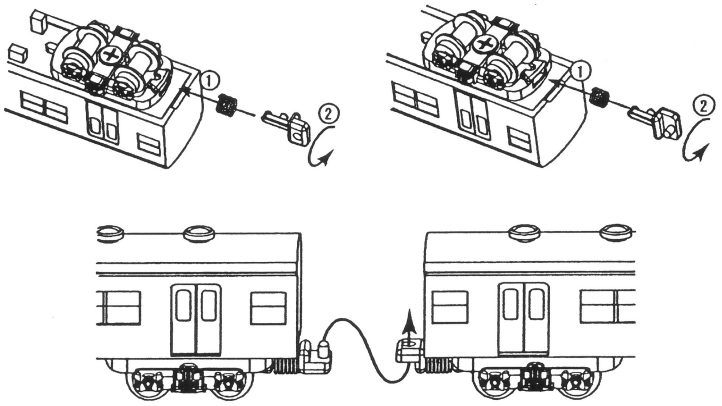

- If the rails become dirty, wipe them with soft cloth, then clean with such tool as pictured.
  (※Do not use alcholic liquid rail cleaner.)
- Use the wheel cleaner included in the "Basic Rail & Power Box Set" to clean the wheels.

